

TEAM CSO

R/C RACING PRODUCTS 2015

1/10 SCALE ELECTRIC POWERED TOURING CAR



***Enjoy Building and
Driving you CSO V3!***

**Need help or Support.
if you need help or you would
like to leave us a comment.
please email to our support team:
inthobby@hotmail.com**

**Thank you for purchasing
Team CSO R/C Racing Productt.**


The contents are subject to change without prior notice due to product improvements and specification changes.

This radio control model car is not a Toy!

ITEM:CSO-33001 CSO-V3 TOURING CAR
Manual Ver.O.9 2014-11-28


Front Spool Build - Bag 1 - Step1

頭直軸安裝：

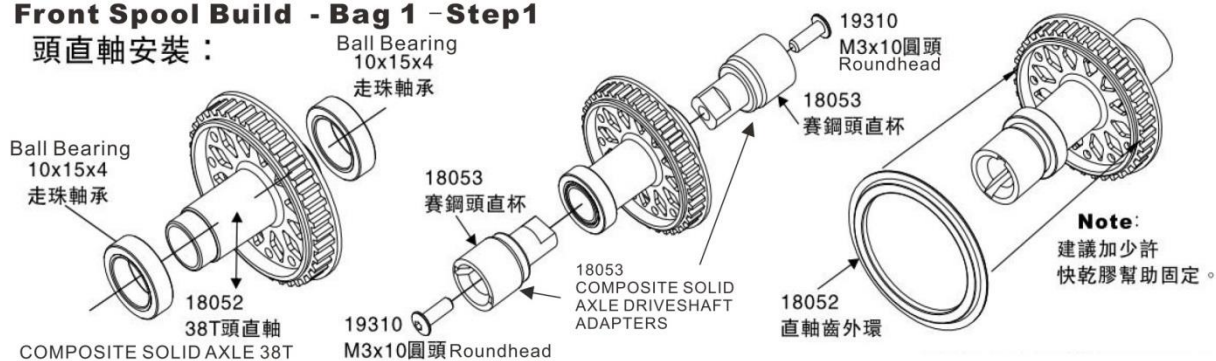


Differential Build - Bag 2 - Step1


差速器安裝：

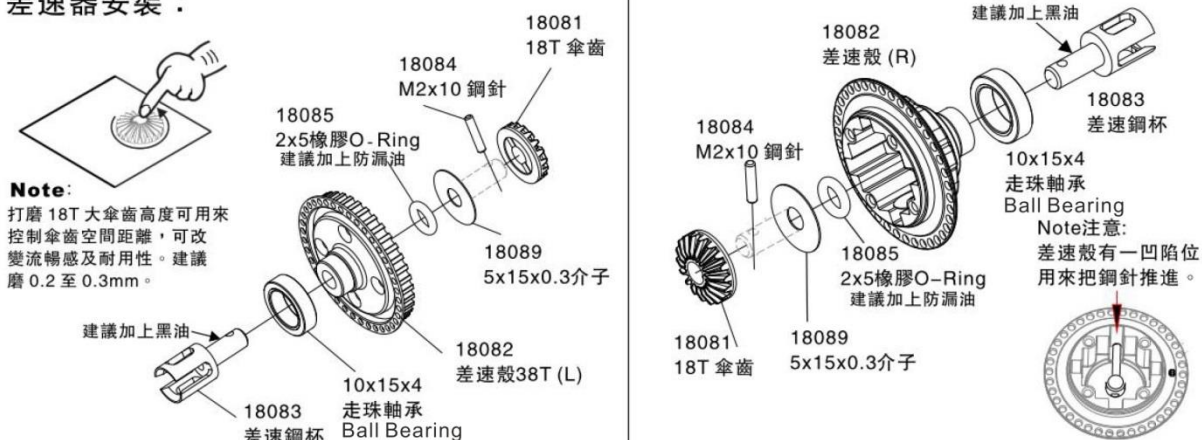


Differential Build - Bag 2 - Step2

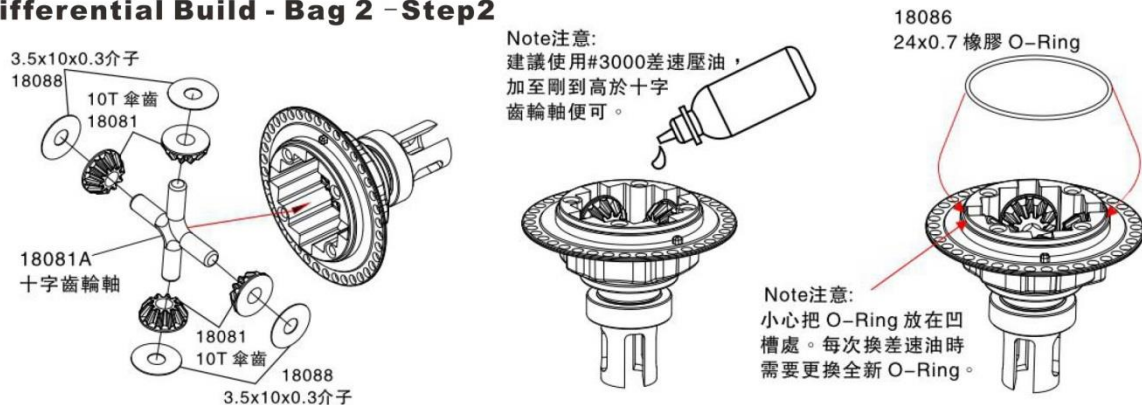


Differential Build - Bag 2 - Step3

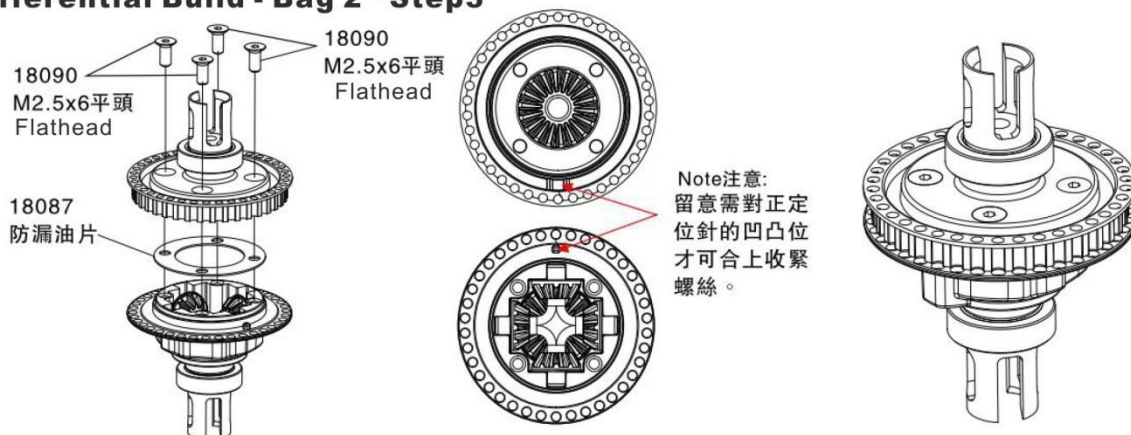


CENTRAL TRANSMISSION Build - Bag 3

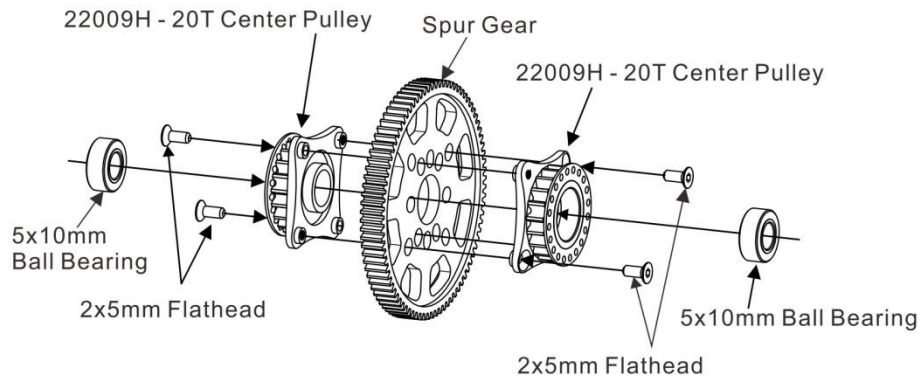


Chassis Build - Bag 4 - Step1

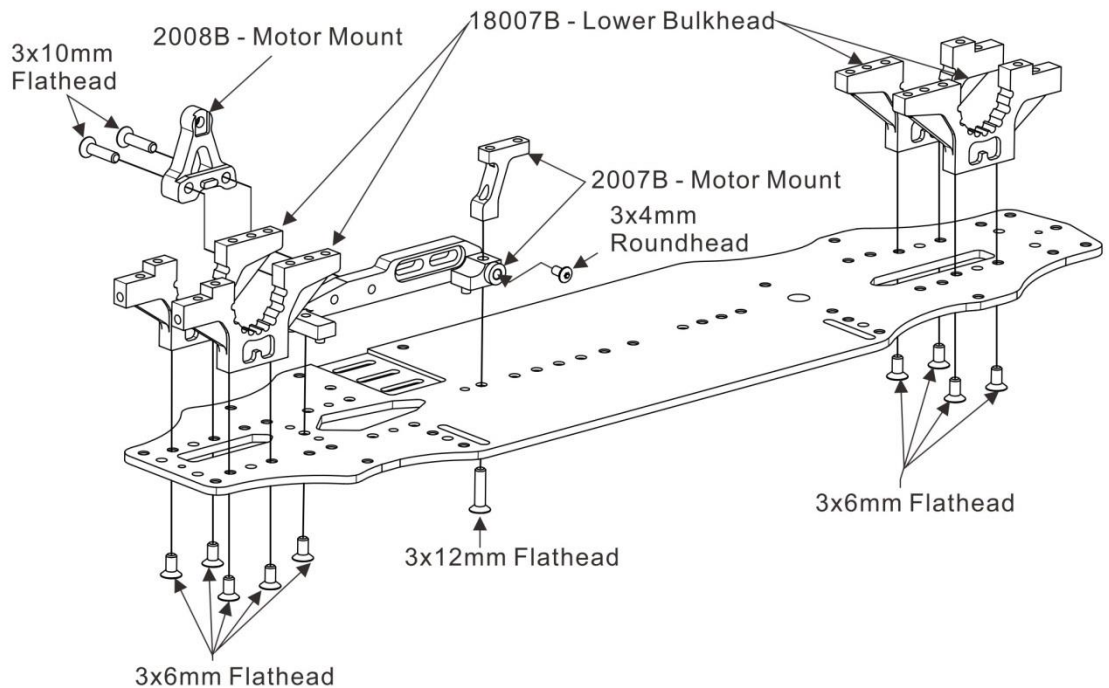


Chassis Build - Bag 4 - Step2

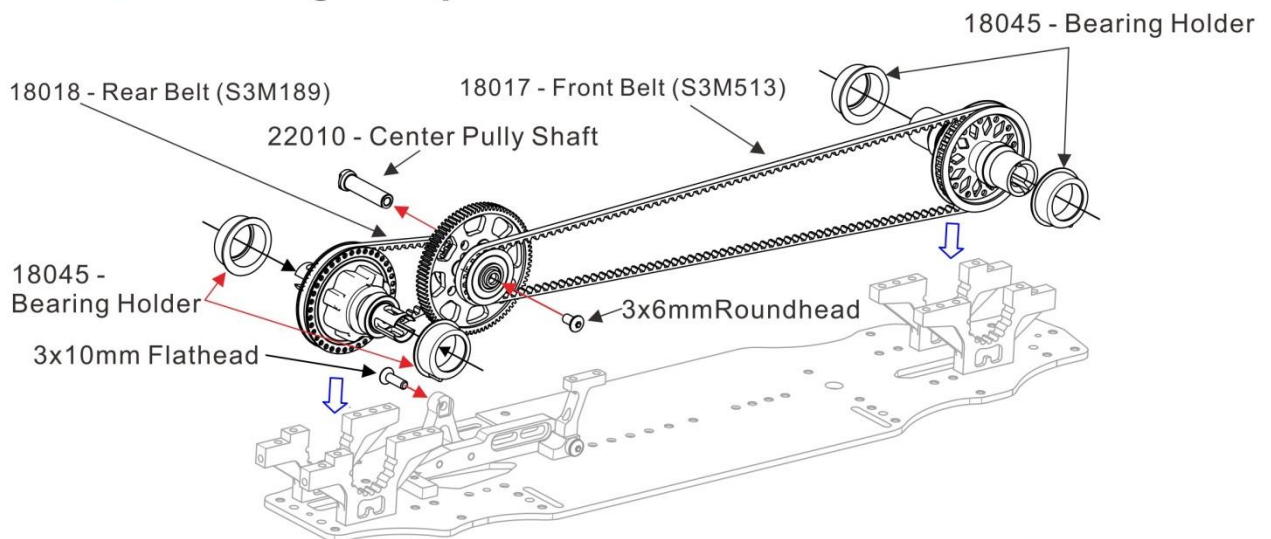

Chassis Build - Bag 4 - Step3

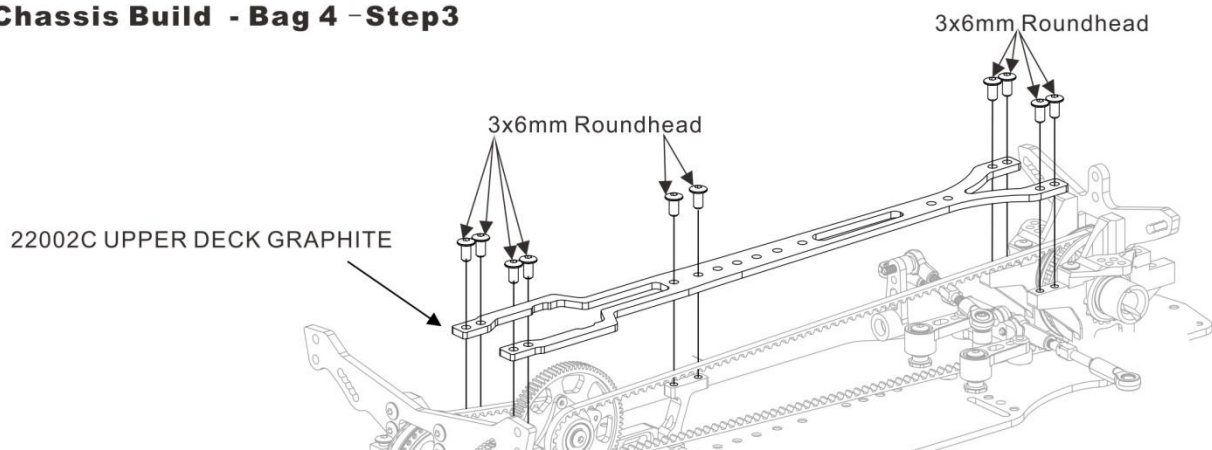


Side Panel on the Cover Build - Bag 5

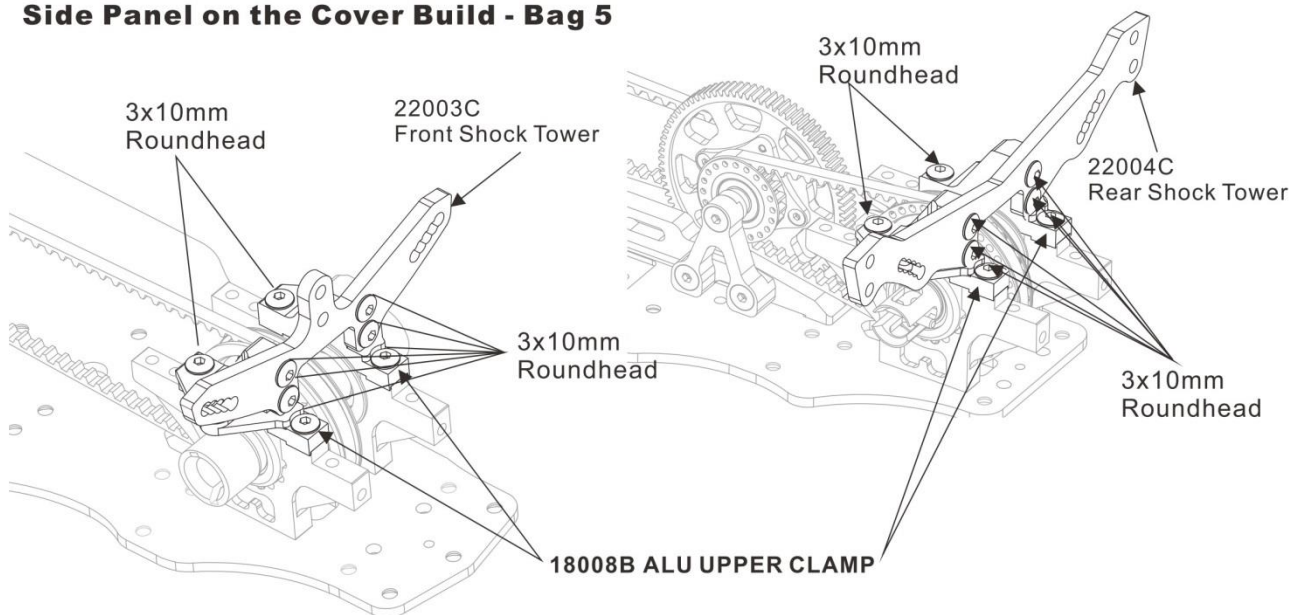


Turnbuckle Build - Bag 6




SERVO LINK




Steering Link (LEFT)




Steering Link (RIGHT)



Rear toe Turnbuckle X 2




Front Camber linkage X 2




Rear Camber linkage X 2


Steering Build - Bag 7

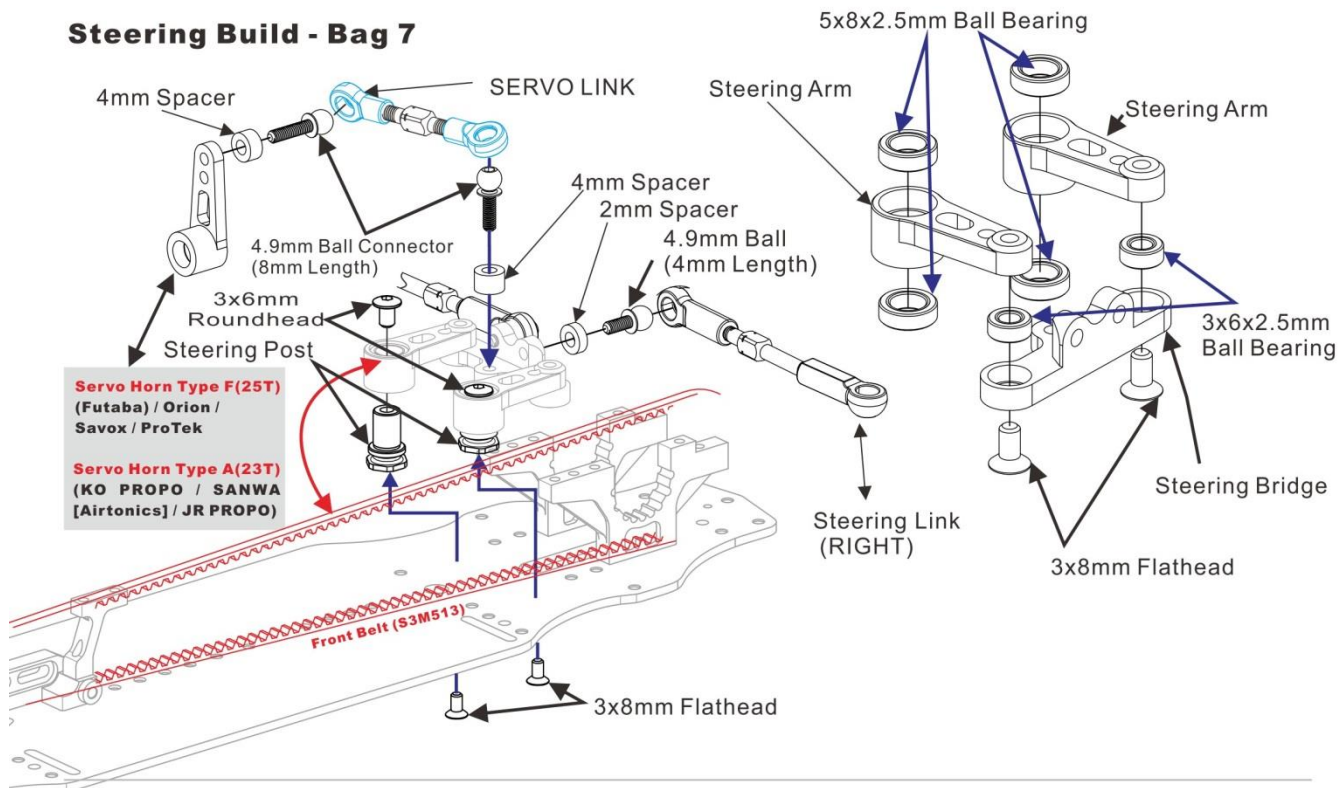


Front Suspension Build - Bag 8

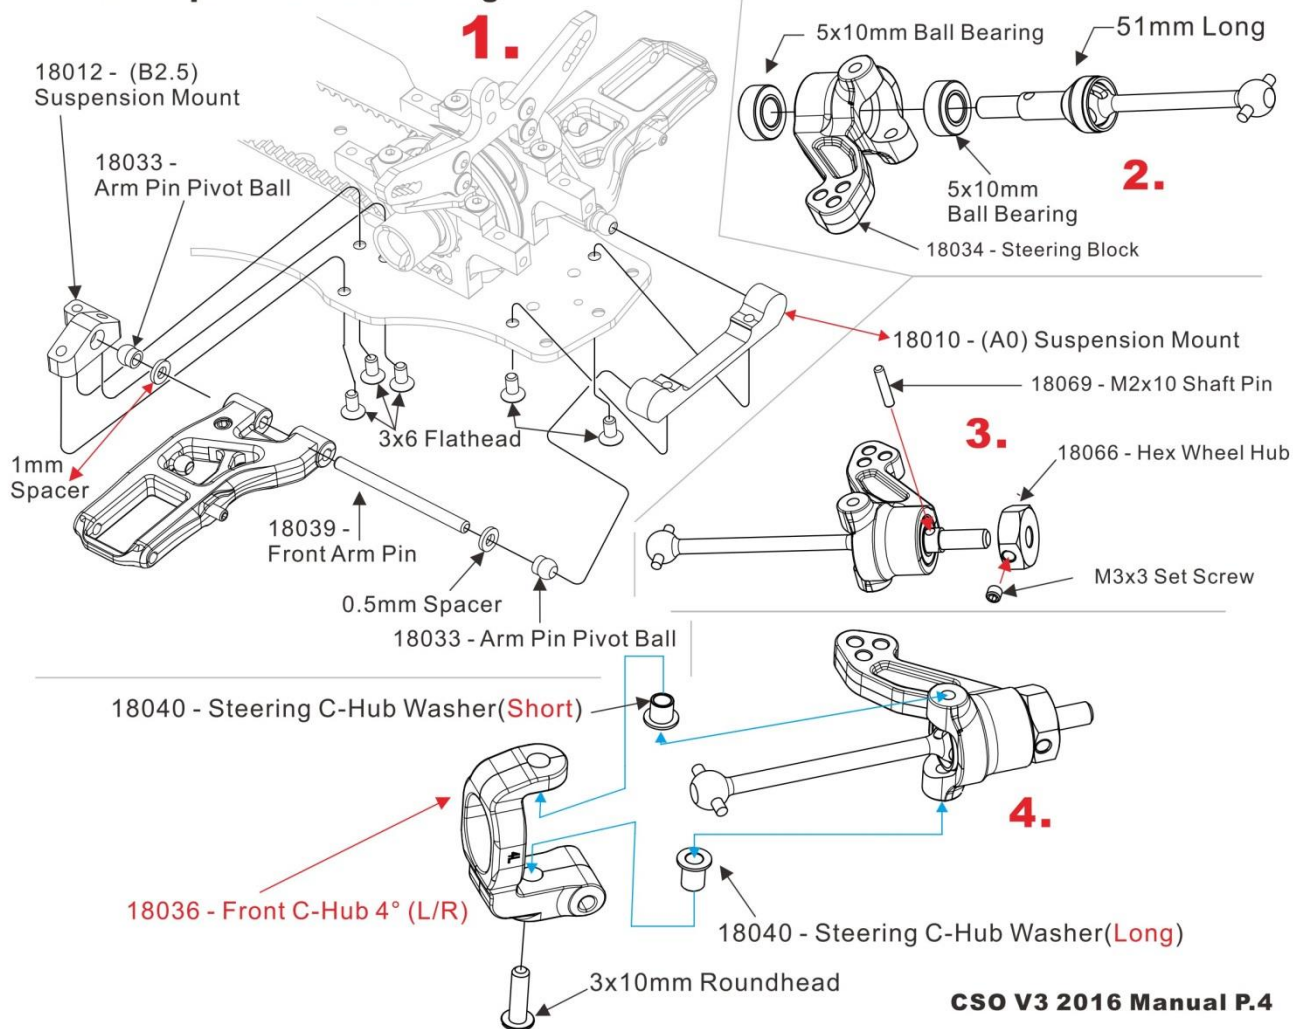


Front Suspension Build - Bag 8 - Step2

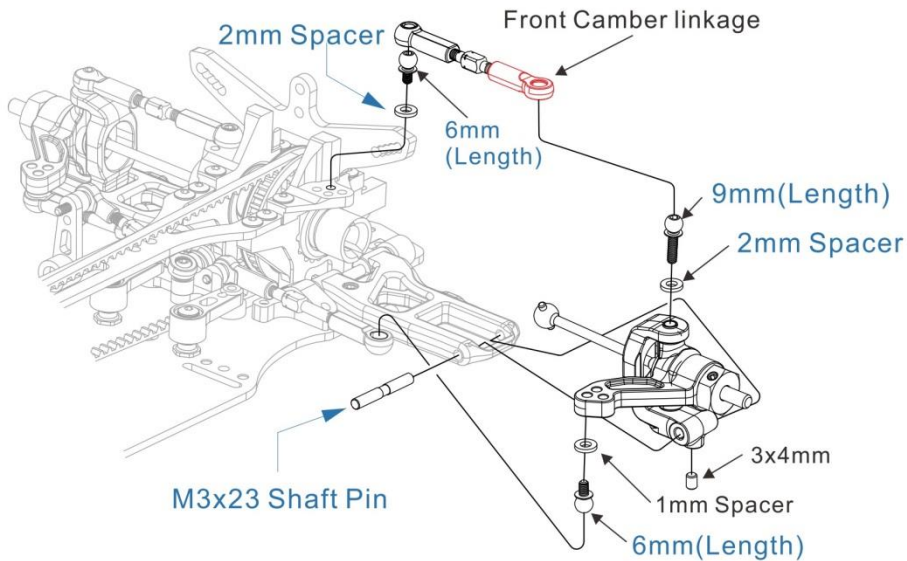



Rear Suspension Build - Bag 9

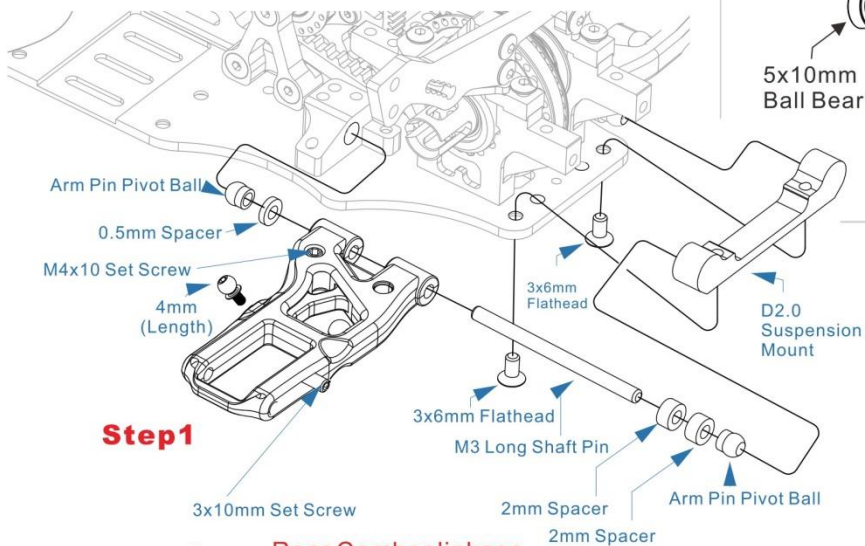

Step2

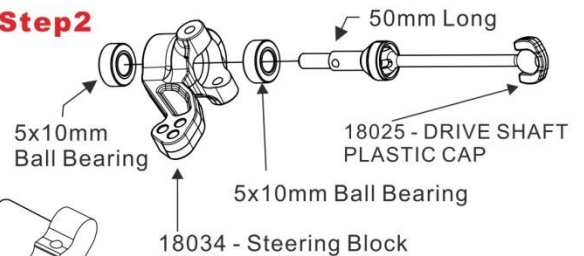


Step3

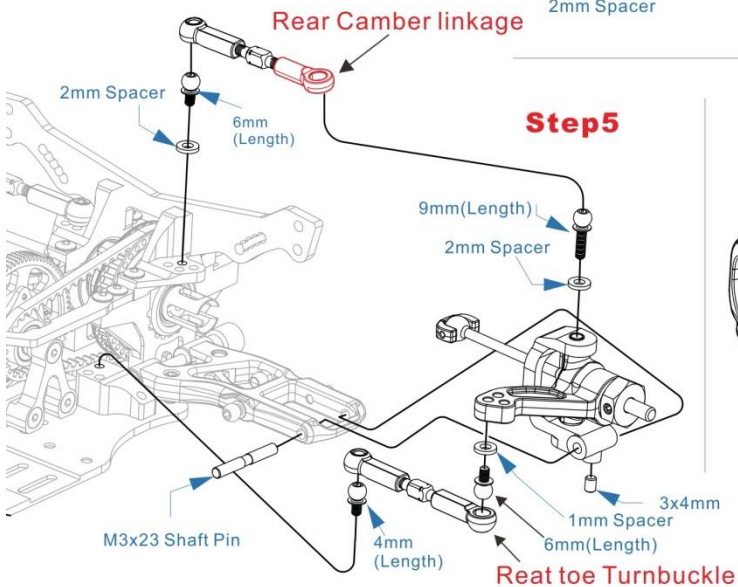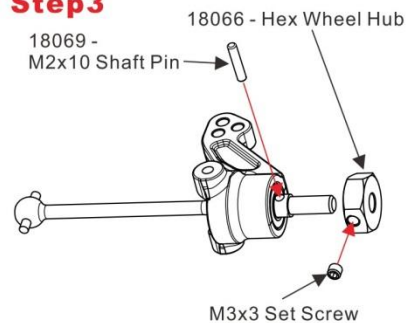


18040 - Steering C-Hub Washer(Short)


Step4

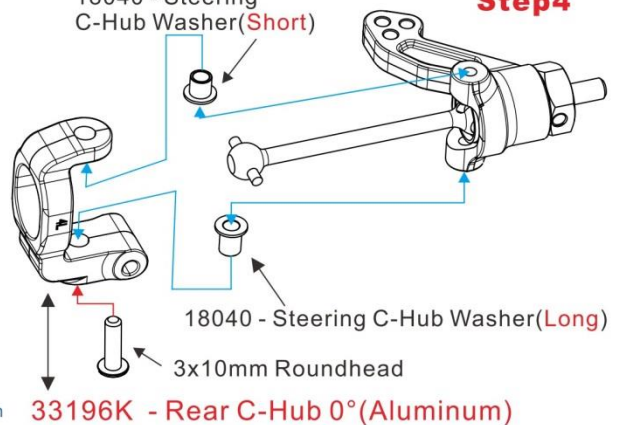

Swaybar Build - Bag 10

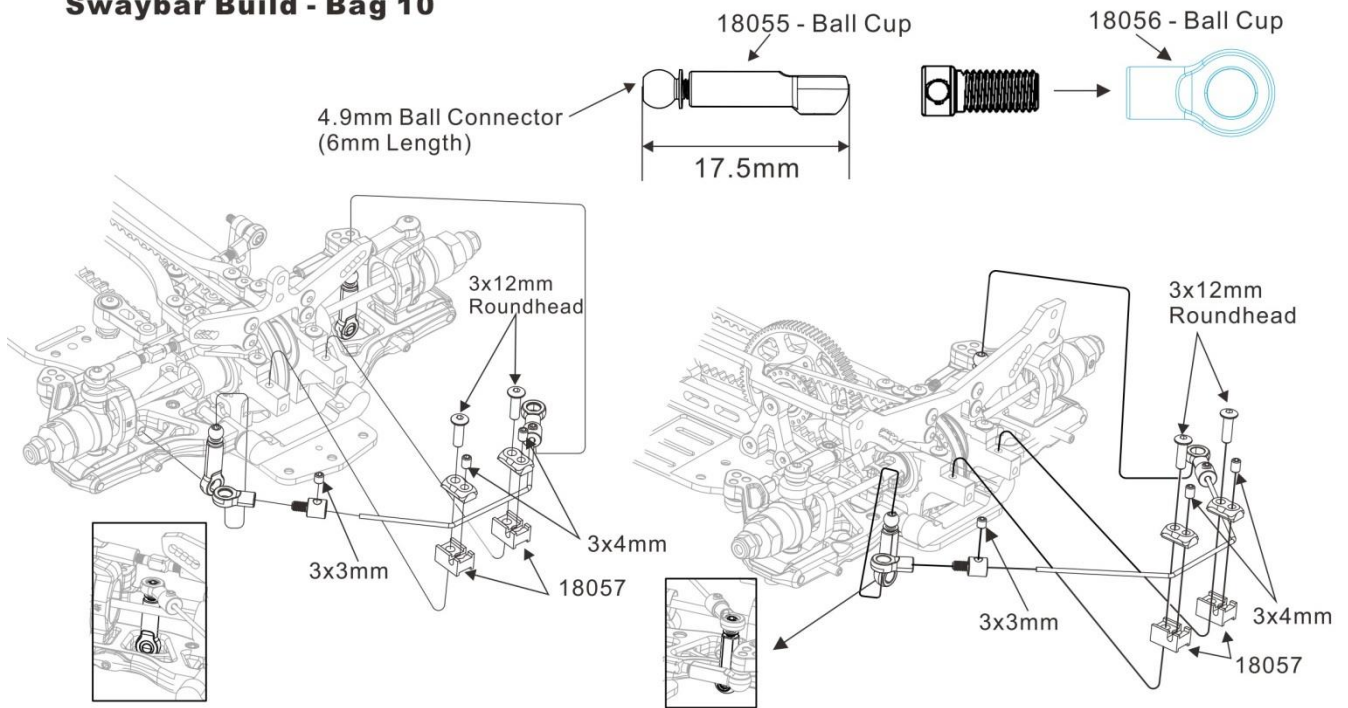


Boby Mount and Bumper Build - Bag 11

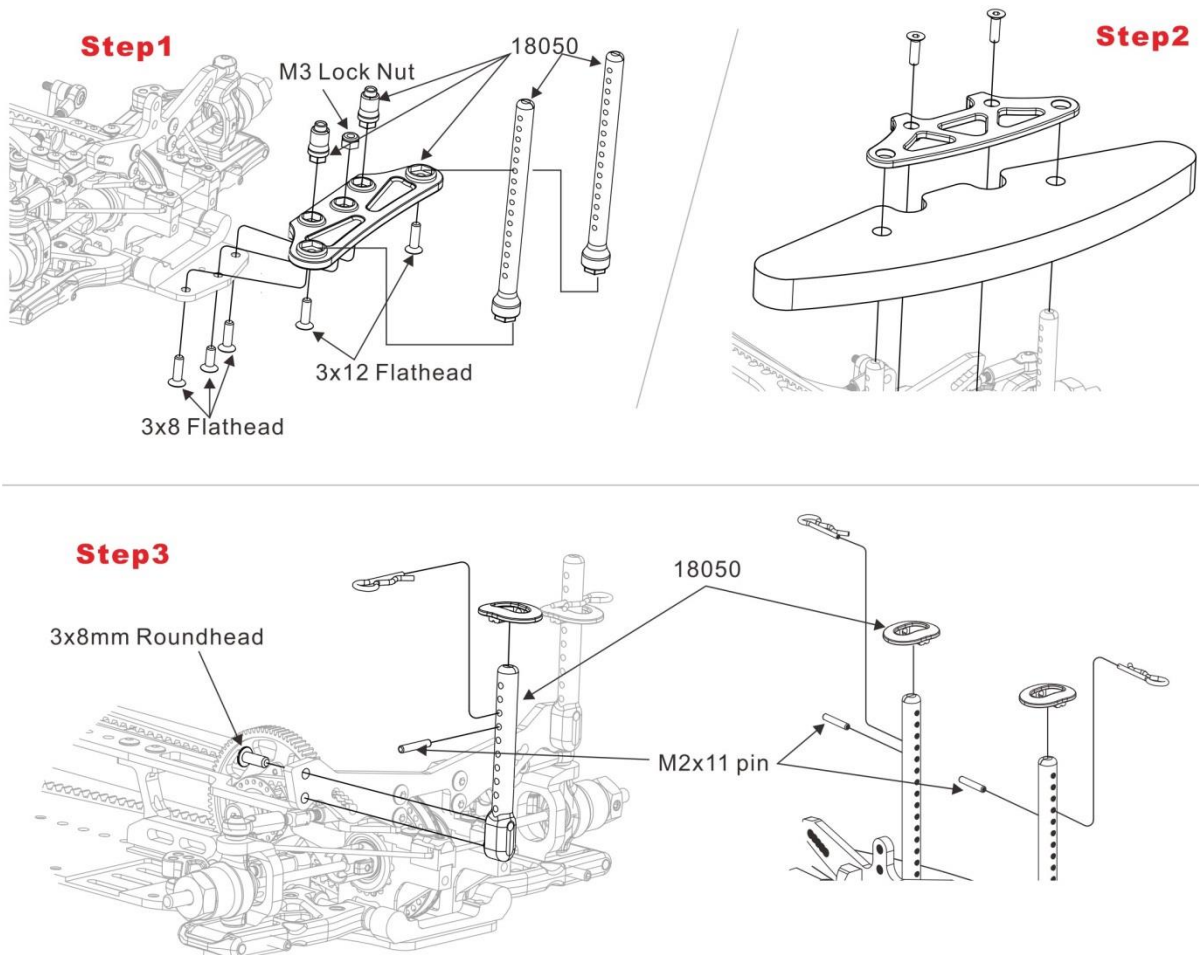


Shock Build - Bag 12 - Step1

油壓器安裝：

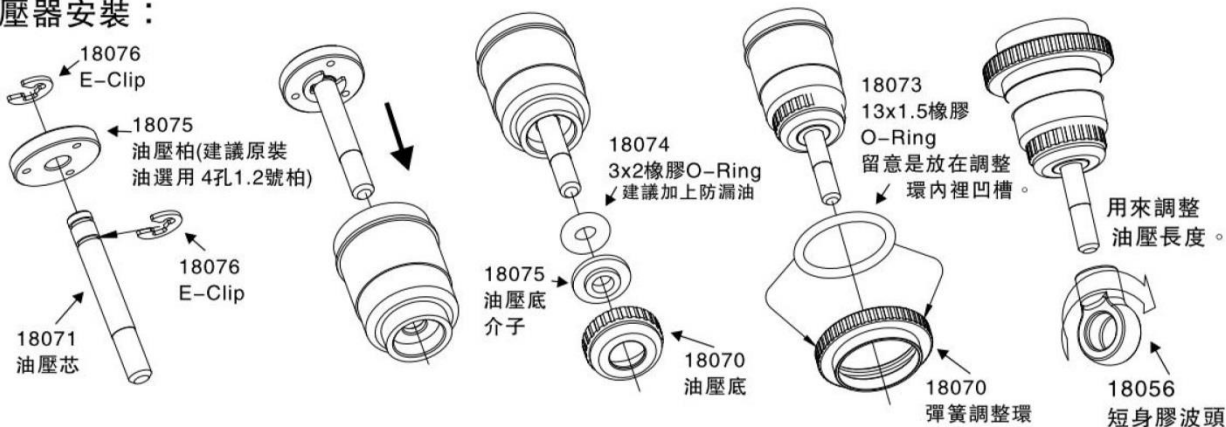

Shock Build - Bag 12 - Step2


油壓器安裝：

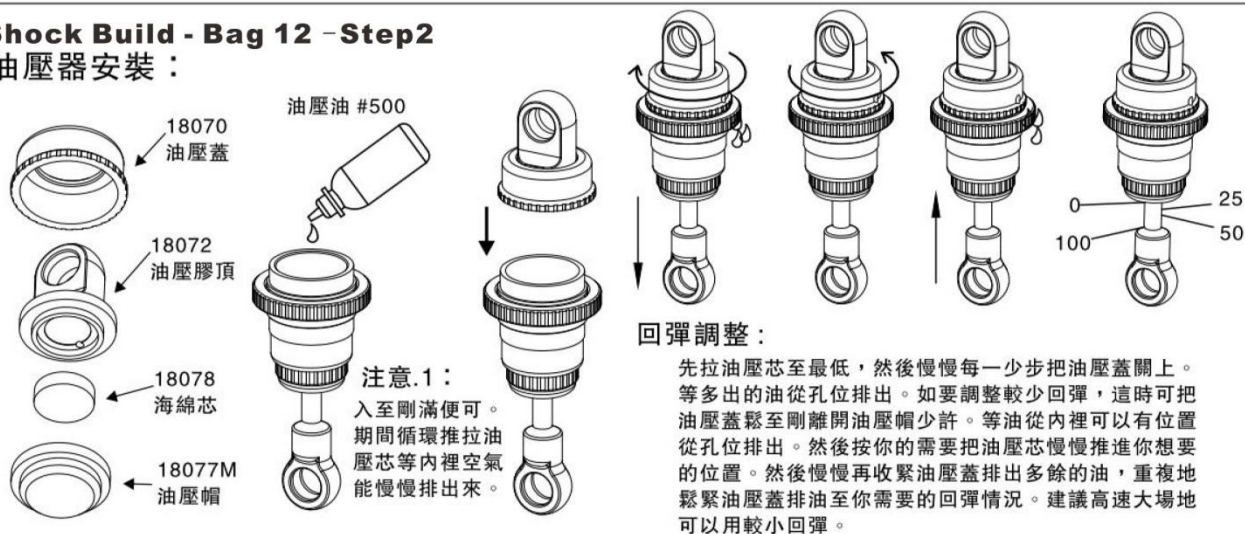

回彈調整：

先拉油壓芯至最低，然後慢慢每一少步把油壓蓋關上。等多出的油從孔位排出。如要調整較少回彈，這時可把油壓蓋鬆至剛離開油壓帽少許。等油從內裡可以有位置從孔位排出。然後按你的需要把油壓芯慢慢推進你想要的位置。然後慢慢再收緊油壓蓋排出多餘的油，重複地鬆緊油壓蓋排油至你需要的回彈情況。建議高速大場地可以用較小回彈。




油壓器安裝：

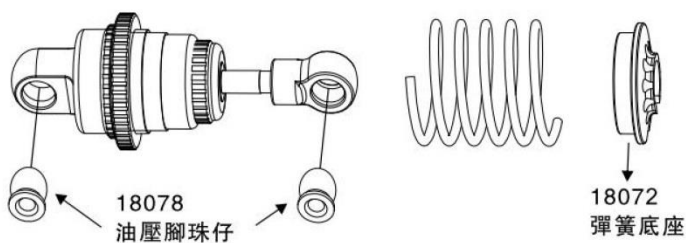


注意.1：

建議油壓彈簧可選擇頭27n及尾25n，這樣大多場地也能合適。而離地車高一般平坦路面可調至車頭4.6mm及車尾5.0mm便可。

原廠有生產彈簧硬度從19n至29n可供按需要選購。

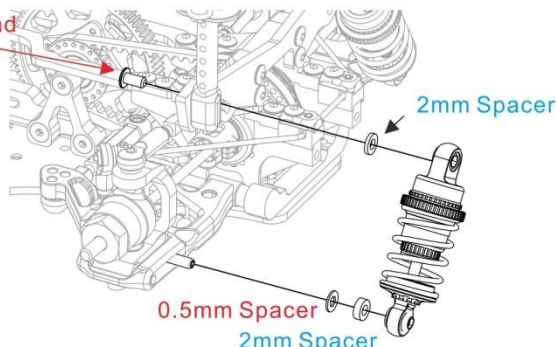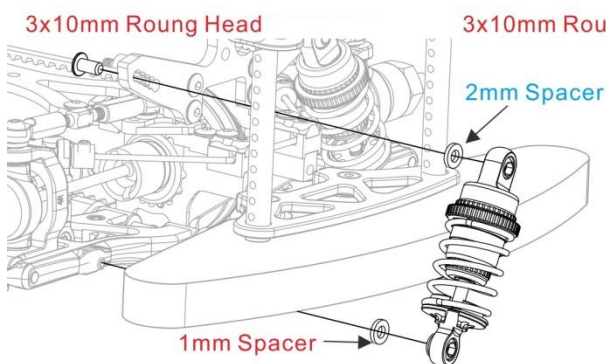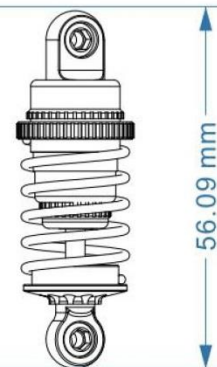

Servo Mount Build

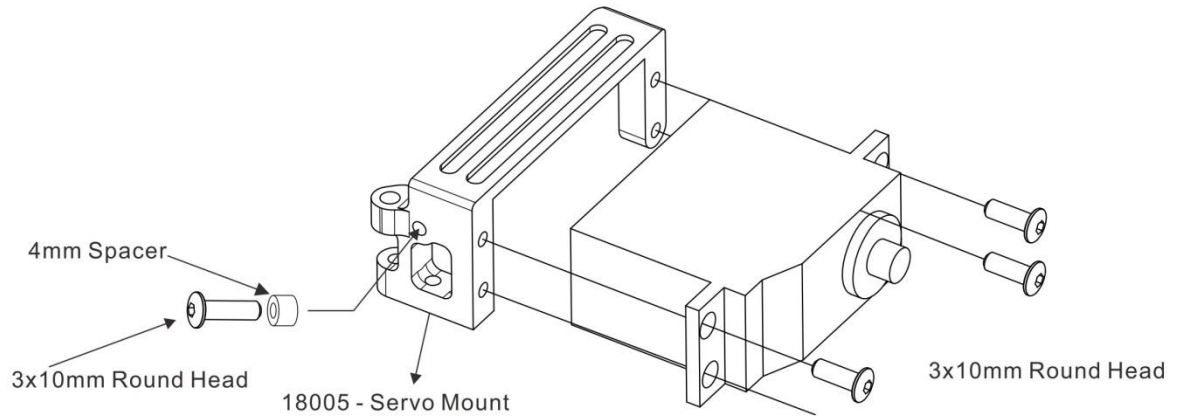

Battery Mount Build - Bag 13

